

XVC6B55SK

60 mm treptajuća zujalica nosača baze ROGBC
tornja



Glavno

Range of product	Harmony XVC6
Product or component type	Complete pre-wired monolithic tower light
Beacon or indicator bank unit type	5 illuminated units
Sound signalling	Buzzer
Mounting diameter	60 mm
Component name	XVC
Light source	Blue LED steady or flashing Clear LED steady or flashing Green LED steady or flashing Orange LED steady or flashing Red LED steady or flashing
[Us] rated supply voltage	24 V
Supply circuit type	AC/DC
Noise level	70...85 dB (continuous or intermittent tone) at 1 m

Komplementarno

Material	Polycarbonate (illuminated unit) ABS (acrylonitrile butadiene-styrene) (base unit) PBT + ABS (UL94HB) (top cover)
Product mounting	On base
Cable cross section	0.33 mm ²
AWG gauge	AWG 22
Cable length	850 mm
Marking	CE
[Uimp] rated impulse withstand voltage	0.8 kV
Current consumption	165 mA
Fundamental frequency	2.23 kHz
Flashing frequency	1 Hz
Product weight	0.4 kg
Height	280.8 mm

Okolina

standards	EN/IEC 61000-6-2 EN/IEC 61000-6-3 EN/IEC 61000-6-4
product certifications	UL
protective treatment	TC
ambient air temperature for storage	-35...70 °C
ambient air temperature for operation	-10...50 °C
electrical shock protection class	Class II conforming to EN/IEC 61140
IP degree of protection	IP54 in flat surface installation conforming to EN/IEC 60529

Offer Sustainability

Green Premium product	Green Premium product
Compliant - since 0808 - Schneider Electric declaration of conformity	Compliant - since 0808 - Schneider Electric declaration of conformity

Informacije dane u ovoj dokumentaciji sadrže opće opise i/ili tehničke karakteristike o performansama ovdje sadržanih proizvoda.
 Ova dokumentacija nije namijenjena kao zamjena za niti bi se trebala koristiti za određivanje prikladnosti ili pouzdanosti predmetnih proizvoda za konkretne korisničke primjene.
 Svaki takav korisnik ili integrator dužan je provesti odgovarajuću i poipunu analizu rizika, procjenu i ispitivanje proizvoda u odnosu na odgovarajuću specifičnu primjenu ili uporabu istog.
 Niti društvo Schneider Electric Industries SAS niti bilo koje od njegovih povezanih poduzeća ili podružnica neće preuzeti obvezu ili snositi odgovornost za pogrešnu upotrebu ovdje sadržanih informacija.

Reference not containing SVHC above the threshold	Reference not containing SVHC above the threshold
Available	Available
Need no specific recycling operations	Need no specific recycling operations


Contractual warranty

Warranty period	18 months
-----------------	-----------

Pre-assembled and Pre-wired Tower Light

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

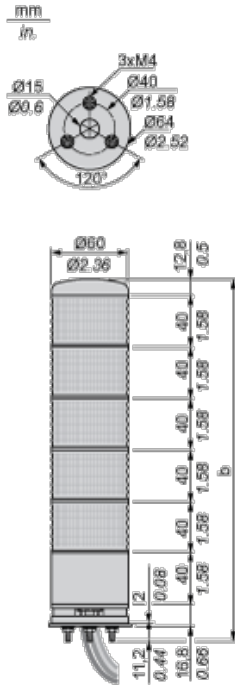

No. of illuminated units	b (mm)	b (in.)
1 stage	120.8	4.76
2 stages	160.8	6.33
3 stages	200.8	7.90
4 stages	240.8	9.48
5 stages	280.8	11.06

Pre-assembled and Pre-wired Tower Light

Mounting on Horizontal Support (Direct or with Fixing Plate)

Panel cut-out

